




## Qoltec LiFePO<sub>4</sub> lithium iron phosphate battery | 25.6V | 200Ah | BMS

Product code: 53709

The Qoltec 200Ah LiFePO<sub>4</sub> battery is a reliable source of energy for your power needs. A maintenance-free, environmentally friendly, fully safe product. Adapted for cyclic discharge and recharge. High performance, long service life and low weight are just a few of the advantages that distinguish the LiFePO<sub>4</sub> battery. The product has a built-in BMS protection system.

### GET EFFICIENCY AT THE HIGHEST LEVEL

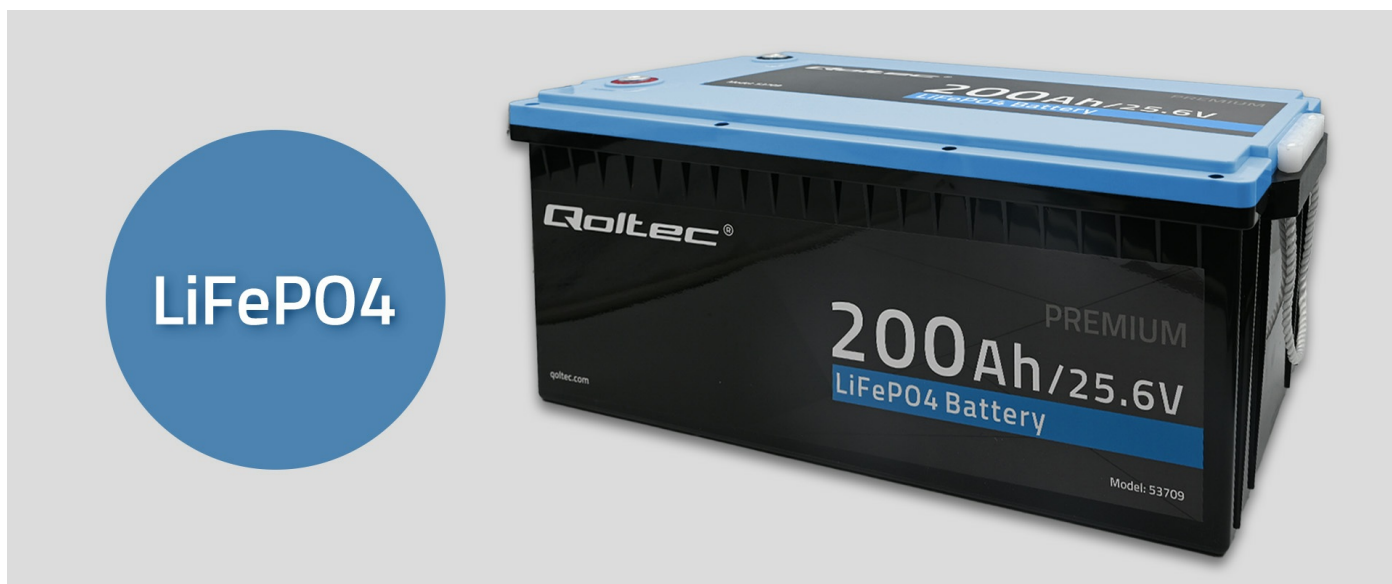

Maintains stable voltage during each charge and discharge cycle

If you are looking for a safe and long-lasting energy source, the LiFePO<sub>4</sub> battery from Qoltec will be a very good investment. This type of battery is all about **thermal and chemical stability**, allowing you to work in very extreme conditions without compromising the performance of the battery and allowing it to retain its full capacity.

## ENSURE A RELIABLE SOURCE OF ENERGY



Completely maintenance-free, low self-discharge battery

LiFePO<sub>4</sub> batteries are durability and performance in one :

- **100% depth of discharge**,
- very low self-discharge rate,
- **no memory effect**, very efficient cycling and buffer operation,
- longer service life - more than 3000 charge and discharge cycles,
- 100% non-combustible battery - no risk of overheating, arson or explosion,
- 100% maintenance-free, no need to top up the electrolyte,
- lower weight and at the same time higher energy density compared to e.g. lead acid batteries,
- **environmentally safe**
- no toxic gases or chemicals are released,
- can be operated in any position, no need to set it horizontally,
- shock-resistant.

## ADVANCED LiFePO4 TECHNOLOGY - MORE POWER, LESS CHARGING



Service life of more than 2000 charge cycles

Our batteries are **extremely efficient and resistant to deep discharges**. They are characterised by a **longer service life while maintaining their properties of more than 2000 charge and discharge cycles**, and this gives them a major advantage over other batteries currently available on the market. In addition, they are **non-polluting, recyclable, non-toxic and non-flammable**.

## APPLICATION OF LIFEPO4 BATTERIES



The wide range of advantages and functional benefits of lithium-iron-phosphate batteries means that they will meet the expectations of even the most demanding users and are perfect for :

- in photovoltaics, as power storage, off-grid systems,
- uninterruptible power supplies, UPS, voltage converters,
- alarm systems, access control systems,
- campers, trailers,
- electric cars,
- yachts, boats, motorboats,
- golf carts, wheelchairs,
- emergency lighting,
- power tools, lawnmowers,
- electric toys, quads.



## BMS OR INTELLIGENT BATTERY MANAGEMENT SYSTEM



# Battery Management System

All Qoltec LiFePO<sub>4</sub> batteries are equipped with a BMS, which is an essential element of battery protection. It constantly monitors the operation of the battery, protecting the cells from overheating, overcharging and deep discharge, cutting off the power supply when values are exceeded that pose a potential danger to the battery and connected devices.

## CONFIDENCE CONFIRMED BY A GUARANTEE

Quality Guarantee - Long-lasting Power, Reliable Performance

Do you care about the high quality of the product you are buying? Our solutions will meet your expectations. The LiFePO<sub>4</sub> batteries we offer come with a 24-month warranty valid from the date of purchase.

## TECHNICAL DATA

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Producer                     | Qoltec                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Battery type                 | LiFePO4                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Power                        | 5120Wh                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Capacity                     | 200Ah                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Nominal voltage              | 25.6V                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Rating limited voltage       | 20.8V-29.2V                                                                                                                                                                                                                                                                                                                                                                                                               |
| Type of charging             | CV                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Battery charging voltage     | 29.0 0.2V                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Number of charging cycles    | Retains more than 80% of capacity even after 3000 charging cycles                                                                                                                                                                                                                                                                                                                                                         |
| Internal resistance          | 9m                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Connector type               | M8                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Maximum charging current     | 50A                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Maximum discharge current    | 100A                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Standard charging current    | 40A                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Standard discharging current | 100A                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Cut off voltage              | 10.4V                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Protection                   | Battery with BMS                                                                                                                                                                                                                                                                                                                                                                                                          |
| Application                  | Photovoltaics, Off-grid systems, Energy storage, Emergency power supply, Electric cars, Campers, Yachts, Wheelchairs, Power tools, Emergency lighting                                                                                                                                                                                                                                                                     |
| Additional information       | <p>The maximum number of batteries connected in parallel is 4 units.</p> <p>The maximum number of batteries connected in series is 2 units.</p> <p>When connecting batteries in series, make sure that the voltage differences between the batteries do not exceed 1 V. We do not recommend connecting batteries from different batches or brands, as differences in BMS systems and cells may affect their operation</p> |
| OTHER PARAMETERS             |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Colour                       | Black, blue                                                                                                                                                                                                                                                                                                                                                                                                               |
| Operating temperature range  | Discharge : -15 60<br>Charge : 0 60<br>Storage : -15 50                                                                                                                                                                                                                                                                                                                                                                   |
| Storage temperature range    | 1 month - 20 ~ 45<br>3 months - 20 ~ 45<br>1 year - 20 ~ 20                                                                                                                                                                                                                                                                                                                                                               |
| Storage humidity             | 45 85%RH                                                                                                                                                                                                                                                                                                                                                                                                                  |
| IP Rating                    | IP65                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimensions (D/L x W x H)     | 270 x 520 x 220 mm                                                                                                                                                                                                                                                                                                                                                                                                        |
| Package depth / length [mm]  | 330                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Package width [mm]           | 600                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Package height [mm]          | 280                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Net weight [kg]              | 36.000                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Gross weight [kg]            | 37.000                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Certificate                  | CE                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Warranty                     | 24 month                                                                                                                                                                                                                                                                                                                                                                                                                  |
| EAN code                     | 5901878537092                                                                                                                                                                                                                                                                                                                                                                                                             |