




Qoltec Solar charge controller MPPT 15A for powering DC consumers and charging batteries 12V / 24V | LiFePO4

Product code: 53671

The 15A solar controller with Maximum Power Point Tracking (MPPT) technology is a high-performance device that manages the battery charging process from photovoltaic panels and enables DC loads to be powered directly from the photovoltaic panels. Thanks to MPPT technology, you'll get the maximum power from your PV system, whilst the built-in USB port allows you to quickly charge your phone or tablet.

- Automatic operating voltage detection – 12V or 24V
- Ability to charge the battery and power DC devices simultaneously
- Protection against overcharging, short circuits, reverse polarity and overload

SMART SOLAR ENERGY MANAGEMENT

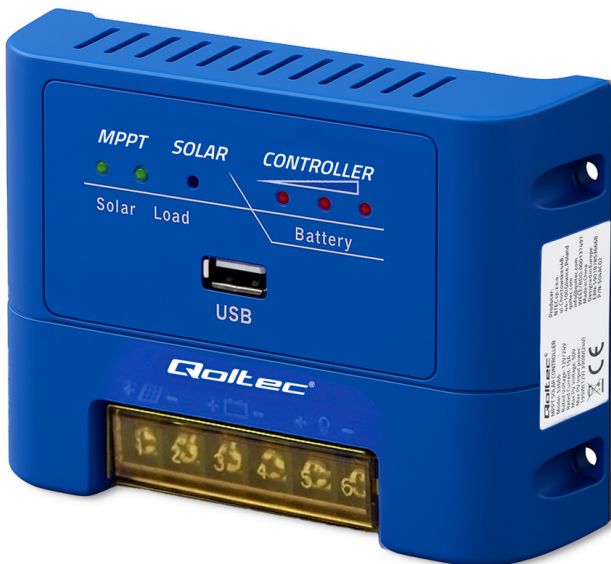

Unlock maximum potential with MPPT technology

The controller uses MPPT technology, which maximizes energy efficiency by enabling optimal utilization of solar power. It continuously monitors and adjusts the voltage and current from the photovoltaic panels to ensure maximum power point tracking. This advanced energy management allows for the highest possible efficiency from solar panels, even under varying weather conditions such as partial shading or changes in sunlight intensity.

ADJUST THE SYSTEM TO YOUR NEEDS



Full solar power at your fingertips

The charge controller is an essential component in photovoltaic systems on boats and RVs. **The solar system provides independence from stationary power sources, allowing the use of energy in places where access to the grid is limited or non-existent** . The controller ensures not only efficient battery charging and **maximum performance of the solar panels but also protection against various hazards such as excessive discharge, overload, and reverse connection** . This ensures that solar systems operate reliably, delivering the necessary power both on the water and during road trips. With full compatibility with lithium-iron-phosphate technology, it guarantees precise and safe charging, maximizing battery life.

MAXIMUM EFFICIENCY, FULL CONTROL AND SAFETY OF YOUR PHOTOVOLTAIC INSTALLATION



Compatible with LiFePO4 batteries

Forget about complicated operation - the controller recognises the installation itself and adapts to your needs. Charges the battery, powers lights, fans or the tourist fridge, plus has a USB port to charge your phone.

- Automatic recognition of operating voltage - 12V or 24V
- High efficiency 99% and optimal power matching from PV panels
- Possibility to charge the battery and power DC devices simultaneously
- Built-in USB port
- Supports LiFePO4 batteries

YOUR SAFETY IS OUR PRIORITY – ADVANCED SECURITY TECHNOLOGIES



Complete protection – from overheating safeguards to short-circuit protection

The product is equipped with a number of safety features to ensure safe and reliable use :

- **Automatically disconnects the system if a short circuit is detected, protecting the equipment and the installation**
- **Battery over-discharge protection** : disconnects the load when the voltage falls below a safe level
- **Automatically disconnects the load when it detects that the current exceeds safe limits**
- **Equipped with a polarity detection circuit**, which checks that the solar panel cables are correctly connected
- **Protection against reverse battery connection** blocks the flow of current, preventing damage to the battery and regulator

CONFIDENCE CONFIRMED BY A WARRANTY

Product with 24 months guarantee

Do you care about the high quality of the product you are buying? Our solutions will meet your expectations. The regulator we offer is covered by a **24-month warranty** valid from the date of purchase.

TECHNICAL DATA

Producer	Qoltec
Maximum power	195W for PV 12V 390W for PV 24V
Rated voltage	12/24V
Rated current	15A
Maximum voltage	(PV) 50V
Maximum PV array open circuit voltage	100V
MPPT efficiency	99%
Battery type	Compatible with LiFePO4
Safety	Short-circuit protection Overheating protection Overload protection Overcharge protection
Usage	Home photovoltaic systems Portable solar kits Solar systems in RVs and caravans Solar installations on boats and yachts Any location requiring efficient and reliable battery charging management
Additional information	USB output (5 V / 1 A) 12 AWG / 4 mm connectors Does not charge AGM batteries No built-in temperature sensor
IP rating	IP30
Operating temperature	-35°C ~ +55°C
Storage temperature	-30°C do +80°C
OTHER PARAMETERS	
Colour	Niebieski
Material	ABS, metal
Dimensions (D/L x W x H)	130 x 100 x 33mm
Package	Box
Package contents	1 x MPPT Controller 1 x User Manual 1 x Warranty card
Package depth / length [mm]	110
Package width [mm]	148
Package height [mm]	43
Net weight [kg]	0.287
Gross weight [kg]	0.326
Certificate	CE
EAN code	5901878536712