



## Qoltec Self-locking cable tie | 4.8\*160 mm | 100 pcs. | Nylon66 | UV | White

Product code: 52242

High-quality **Qoltec cable ties** are highly functional and suitable for practically any application. They feature:

- high mechanical and thermal strength,
- UV resistance,
- resistance to acids,
- easy installation.


### QOLTEC – CABLE TIES THAT ORGANIZE ANY CHAOS!



### Cable ties designed for home, office, and industrial applications

Discover the versatility of Qoltec cable ties, commonly referred to as **zip ties**, made from **flexible and durable nylon 66**. These practical accessories are perfect for **organizing** various elements, from cable management in your home or office. Thanks to their **versatility**, they are found everywhere — from **households and telecommunications to automotive workshops, gardening, electrical installations, and warehouses**. See how Qoltec cable ties can simplify your daily tasks!

## HOW TO USE SELF-LOCKING CABLE TIE ?

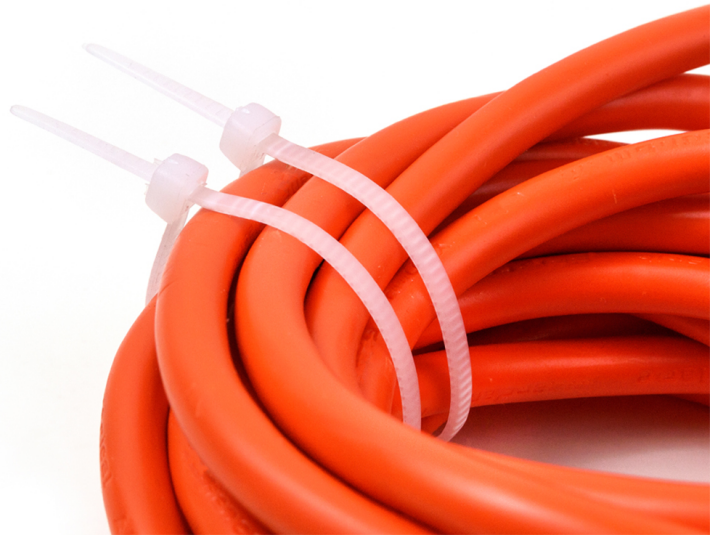

### Advantages of nylon 66 include flexibility along with durability, UV resistance, chemical resistance, and a wide temperature range

Qoltec cable ties are high-quality products resistant to tearing. Made from nylon 66, they offer significantly better properties compared to traditional PVC ties:

- 1. **Nylon 66** is a material with **higher tensile strength and tear resistance**, making these ties more durable and reliable, even in tough conditions.
- 2. It maintains its properties over a wide temperature range from **-35 C to +85 C**, making zip ties ideal for **use in various environments**.
- 3. The ties are also **UV-resistant**, preventing degradation from prolonged sun exposure.
- 4. Nylon 66 offers **resistance to many chemicals**, making Qoltec ties suitable for use in **workshops, laboratories, and other industrial environments**.

## CABLE TIES: YOUR ALLY IN ORGANIZATION AND STABILITY



### Incredibly intuitive installation allows for a perfect fit to the user's needs

Using cable ties is exceptionally **quick and easy**! Simply **fit** the tie around the items to be joined, **thread** the end through the opening, and **tighten**. Due to their flexibility and elasticity, the tie enables **easy adjustment of the grip**, making it highly functional. Additionally, the evenly spaced teeth allow for **precise alignment of the joined elements**, ensuring reliability and durability in every application.

## CONFIDENCE BACKED BY WARRANTY



### Product covered by a 2-year warranty

Looking for high quality in your purchase? Our solutions meet your expectations. This product comes with a **24-month warranty** from the date of purchase.

## TECHNICAL DATA

|                             |                                                                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Producer                    | Qoltec                                                                                                                                                                                                                                                           |
| Material                    | Nylon 66                                                                                                                                                                                                                                                         |
| Dimensions                  | 4.8*160 mm                                                                                                                                                                                                                                                       |
| Quantity                    | 100 pcs                                                                                                                                                                                                                                                          |
| Resistance grade            | UL 94 kl. V2                                                                                                                                                                                                                                                     |
| Operating temperature       | -35°C ~ +85°C                                                                                                                                                                                                                                                    |
| Additional information      | <ul style="list-style-type: none"><li>- easy to install</li><li>- UV resistance</li><li>- high thermal strength</li><li>- high mechanical strength</li><li>- resistant to acids</li><li>- resistant to high temperature</li><li>- resistant to erosion</li></ul> |
| OTHER PARAMETERS            |                                                                                                                                                                                                                                                                  |
| Colour                      | White                                                                                                                                                                                                                                                            |
| Package depth / length [mm] | 230                                                                                                                                                                                                                                                              |
| Package width [mm]          | 115                                                                                                                                                                                                                                                              |
| Package height [mm]         | 25                                                                                                                                                                                                                                                               |
| Net weight [kg]             | 0.050                                                                                                                                                                                                                                                            |
| Gross weight [kg]           | 0.082                                                                                                                                                                                                                                                            |
| Warranty                    | 24 month                                                                                                                                                                                                                                                         |
| EAN code                    | 5901878522425                                                                                                                                                                                                                                                    |