



## Qoltec Self-locking cable tie | 7.2\*200mm | 50 pcs. | Nylon66 | UV | Black

Product code: 52216

High-quality Qoltec cable ties are highly functional and suitable for practically any application. They feature:


- high mechanical and thermal strength,
- UV resistance,
- resistance to acids,
- easy installation.

### QOLTEC – CABLE TIES THAT ORGANIZE ANY CHAOS!



### Cable ties designed for home, office, and industrial applications

Discover the versatility of Qoltec cable ties, commonly referred to as zip ties, made from flexible and durable nylon 66. These practical accessories are perfect for organizing various elements, from cable management in your home or office. Thanks to their versatility, they are found everywhere — from households and telecommunications to automotive workshops, gardening, electrical installations, and warehouses. See how Qoltec cable ties can simplify your daily tasks!

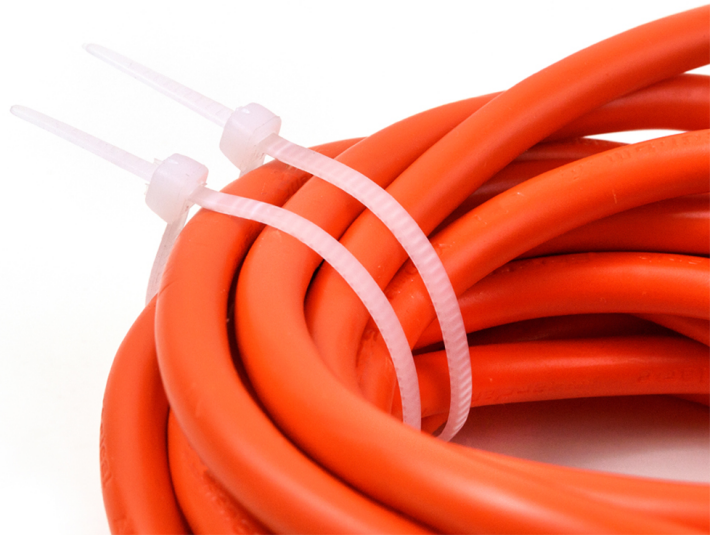

### Advantages of nylon 66 include flexibility along with durability, UV resistance, chemical resistance, and a wide temperature range

Qoltec cable ties are high-quality products resistant to tearing. Made from nylon 66, they offer significantly better properties compared to traditional PVC ties:

- 1. **Nylon 66** is a material with **higher tensile strength and tear resistance**, making these ties more durable and reliable, even in tough conditions.
- 2. It maintains its properties over a wide temperature range from **-35 C to +85 C**, making zip ties ideal for **use in various environments**.
- 3. The ties are also **UV-resistant**, preventing degradation from prolonged sun exposure.
- 4. Nylon 66 offers **resistance to many chemicals**, making Qoltec ties suitable for use in **workshops, laboratories, and other industrial environments**.

## CABLE TIES: YOUR ALLY IN ORGANIZATION AND STABILITY



### Incredibly intuitive installation allows for a perfect fit to the user's needs

Using cable ties is exceptionally **quick and easy**! Simply **fit** the tie around the items to be joined, **thread** the end through the opening, and **tighten**. Due to their flexibility and elasticity, the tie enables **easy adjustment of the grip**, making it highly functional. Additionally, the evenly spaced teeth allow for **precise alignment of the joined elements**, ensuring reliability and durability in every application.

## CONFIDENCE CONFIRMED BY A WARRANTY



### Product covered by a 2-year warranty

Looking for high quality in your purchase? Our solutions meet your expectations. This product comes with a **24-month warranty** from the date of purchase.

## TECHNICAL DATA

|                             |                                                                                                                                                                                                                                                             |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Producer                    | Qoltec                                                                                                                                                                                                                                                      |
| Material                    | Nylon 66                                                                                                                                                                                                                                                    |
| Dimensions                  | 7.2 x 200 mm                                                                                                                                                                                                                                                |
| Quantity                    | 50 pcs.                                                                                                                                                                                                                                                     |
| Resistance grade            | UL 94 kl. V2                                                                                                                                                                                                                                                |
| Operating temperature       | -35°C to 85°C                                                                                                                                                                                                                                               |
| Additional information      | <ul style="list-style-type: none"><li>- easy of use</li><li>- UV resistance</li><li>- high thermal resistance</li><li>- high mechanical strength</li><li>- resistant to acids</li><li>- resistant to high temperature</li><li>- erosion-resistant</li></ul> |
| OTHER PARAMETERS            |                                                                                                                                                                                                                                                             |
| Colour                      | Black                                                                                                                                                                                                                                                       |
| Package depth / length [mm] | 120                                                                                                                                                                                                                                                         |
| Package width [mm]          | 15                                                                                                                                                                                                                                                          |
| Package height [mm]         | 280                                                                                                                                                                                                                                                         |
| Net weight [kg]             | 0.0950                                                                                                                                                                                                                                                      |
| Gross weight [kg]           | 0.1000                                                                                                                                                                                                                                                      |
| Warranty                    | 24 months                                                                                                                                                                                                                                                   |
| EAN code                    | 5901878522166                                                                                                                                                                                                                                               |