



## Qoltec Solar Charge Controller MPPT with Temperature Sensor 80A | 12V / 24V | LCD | Bluetooth | APP | GEL | LiFePO4

Product code: 53670

An advanced charge controller for photovoltaic systems, ensuring maximum battery charging efficiency thanks to Maximum Power Point Tracking (MPPT) technology. It features a clear LCD display for monitoring operation, system parameters and battery status. A built-in temperature sensor automatically adjusts charging parameters to operating conditions.

Communication: Bluetooth,  
Compatible with: LiFePo4, GEL.

### SMART SOLAR ENERGY MANAGEMENT



Unlock maximum potential with MPPT technology

The controller uses MPPT technology, which maximizes energy efficiency by enabling optimal utilization of solar power. It continuously monitors and adjusts the voltage and current from the photovoltaic panels to ensure maximum power point tracking. This advanced energy management allows for the highest possible efficiency from solar panels, even under varying weather conditions such as partial shading or changes in sunlight intensity.


## ADJUST THE SYSTEM TO YOUR NEEDS



### Compatibility with LiFePO4 batteries

The charge controller is an essential component in photovoltaic systems on boats and RVs. **The solar system provides independence from stationary power sources, allowing the use of energy in places where access to the grid is limited or non-existent** . The controller ensures not only efficient battery charging and **maximum performance of the solar panels** but also **protection against various hazards such as excessive discharge, overload, and reverse connection** . This ensures that solar systems operate reliably, delivering the necessary power both on the water and during road trips. With full compatibility with lithium-iron-phosphate technology, it guarantees precise and safe charging, maximizing battery life.

## INTELLIGENT SYSTEM MANAGEMENT

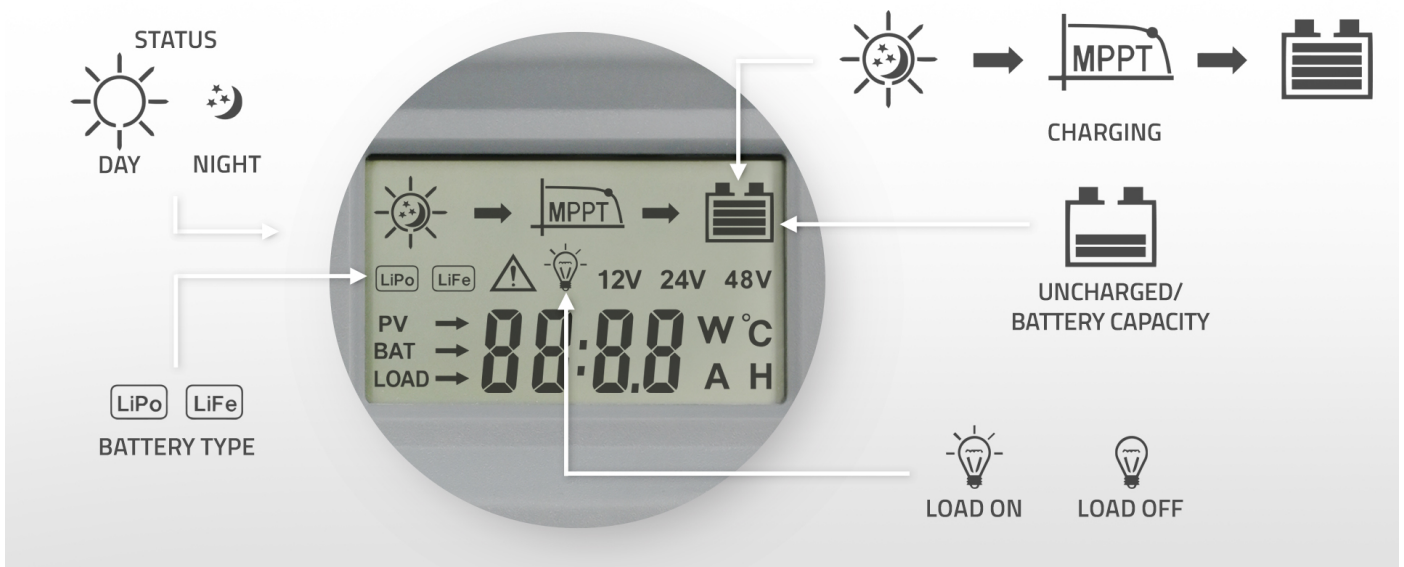

The built-in LCD display provides maximum functionality and ease of use. The intuitive interface allows you to quickly navigate through the settings and easily adjust parameters to suit your needs.

- Easy setup and operation with a user-friendly menu
- Remote monitoring via mobile app
- Battery protection from overheating and overcharging thanks to the external temperature sensor
- Instant alerts for errors and warnings

## OPTIMAL PERFORMANCE THROUGH ADVANCED MONITORING



Intuitive Interface, Complete Control, Bluetooth

The product features an advanced LCD display and integrated Bluetooth, providing users with complete control and clear visibility of system operation. The intuitive display menu simplifies configuration and allows for easy customization of settings to suit individual preferences. The screen displays real-time operating parameters, enabling continuous performance monitoring. With an external temperature sensor and Bluetooth connectivity, you can remotely monitor the system's status via a mobile app, while also protecting the battery from overcharging or overheating. Users can quickly check the current operating status and receive notifications about any errors or alarms.

## YOUR SAFETY IS OUR PRIORITY – ADVANCED SECURITY TECHNOLOGIES



Complete protection – from overheating safeguards to short-circuit protection

The product is equipped with a number of safety features to ensure safe and reliable use : **Short-circuit protection**: Automatically disconnects the system when a short circuit is detected, protecting the equipment and installation **Battery over-discharge protection** : disconnects the load when the voltage drops below a safe level **Overheating protection** : is equipped with a temperature sensor that monitors the temperature of the unit, when the temperature exceeds the safe level, the controller can reduce the charging capacity or shut down the system completely until it cools down **overload protection**: automatically disconnects the load when it detects that the current exceeds the safe limits **Solar panel reverse connection protection**: The regulator is equipped with a polarity detection circuit that checks that the solar panel wires are connected correctly **Battery reverse connection protection** : The regulator blocks the flow of current, preventing damage to the battery and regulator.

## CONFIDENCE CONFIRMED BY A WARRANTY



## Product with 24 months guarantee

Do you care about the high quality of the product you are buying? Our solutions will meet your expectations. The regulator we offer is covered by a **24-month warranty** valid from the date of purchase.

## TECHNICAL DATA

Producer	Qoltec
Maximum power	1040W for PV 12V   2080W for PV 24V   3102W for 36V   4160W for 48V
Rated voltage	12/24/36/48V
Rated current	80A
Maximum PV array open circuit voltage	<150V
MPPT efficiency	95%
Battery type	Compatible with GEL, LiFePO4, Flooded, Li(NiCoMn)o2
Display	LCD
Safety	Short-circuit protection Overheating protection Overload protection Overcharge protection
Usage	Home photovoltaic systems Portable solar kits Solar systems in RVs and caravans Solar installations on boats and yachts Any location requiring efficient and reliable battery charging management
Additional information	Equipped with Maximum Power Point Tracking (MPPT) technology Bluetooth option
IP rating	IP30
Operating temperature	-20°C ~ +55°C
Storage temperature	-30°C do +80°C
OTHER PARAMETERS	
Colour	Grey, Green
Material	ABS, metal
Dimensions (D/L x W x H)	115 x 210 x 285 mm
Package	Box
Package contents	1 x MPPT Controller 1 x User Manual 1 x Warranty card
Package depth / length [mm]	160
Package width [mm]	235
Package height [mm]	335
Net weight [kg]	2.820
Gross weight [kg]	3.000
Certificate	CE
Warranty	24 month
EAN code	5901878536705